
Dual View - All round visibility



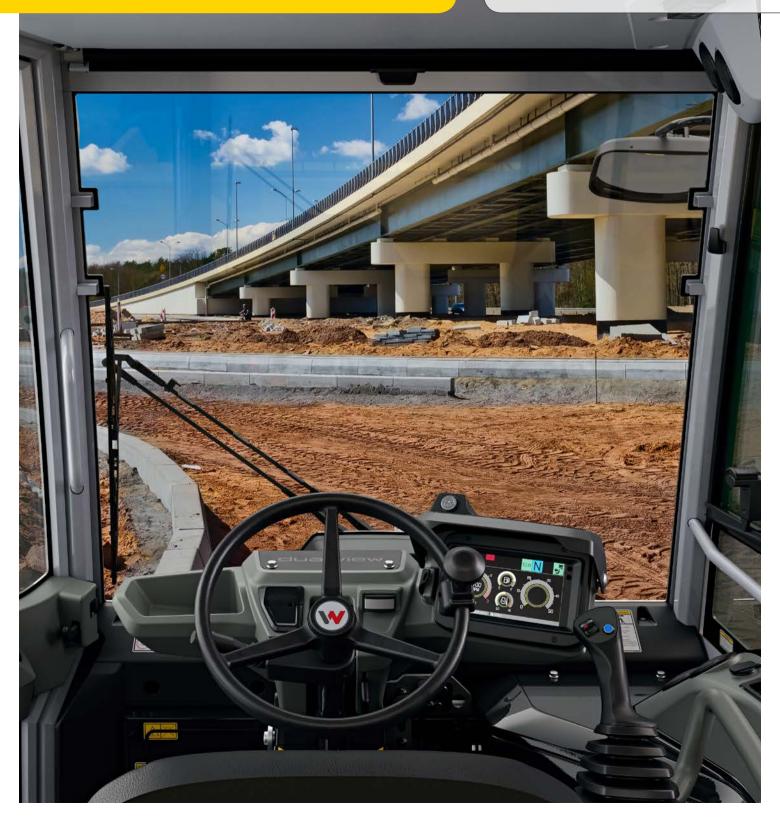

Dual view sets new standards: for an unobstructed view in any situation.

Safety redefined:

always perfect line-of-sight in the main driving direction – as with a truck

After 180° rotation:

the skip and therefore the working area are still ideally in view in this seat position

Easy and intuitive operation

thanks to the fully hydrostatic drive











Better

Further highlights:

- Ergonomic joystick handle with a travel direction switch-over function one hand can always remain on the steering wheel
- Compact dimensions: The dual view safely runs as a construction truck, but is significantly more maneuverable
- Full load monitoring and precise dumping thanks to the high seat position
- Broader and more comfortable entry to the driver's cabin
- Wear-free operation, easy-to-operate spring-loaded parking brake for durability and reliability
- Reduced fuel consumption due to the efficient hydrostatic all-wheel drive with the automatic ECO mode
- Simple maintenance due to access from the ground via the lateral engine hood

Unrestricted view – especially in the main travel direction!



180°-rotation of the entire driver's cabin:

Release the lock, turn the seat together with the console and continue working as usual in no time.



More safety: Perfect view of the working • · · area at all times - whether during transportation, loading or unloading.




Higher productivity: Act safely and with precision, even in confined spaces - no time wasted and no fuel consumption due to maneuvering.




You can find more information about dual view at: www.wackerneuson.com/dualview

Simply see more.

The dual view clearly stands above the requirements of the line-of-sight standard ISO 5006:2017.



From here, you must be able to overlook a height of 1.2 m according to the line-of-sight standard

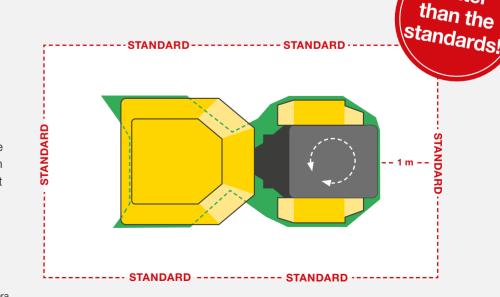

* With mirrors and a rear view camera

Increased operating comfort due to an ergonomic swivel console.

Multifunctional display

for machine functions

Screen for standard rear view-

camera with lockable anti-vandalism protection; screen and camera meet IP69 requirements

Steering column with tilt adjustment facilitates safe ascent and descent

Additional •----storage possibility

with travel direction change-over and skip actuation

Easy 180° rotation – no time-consuming turning maneuvers.

Rotating assembly mounted on bearings for quick change of

for quick change of the sitting position

"With our new dual view concept for wheel dumpers, we have completely redefined safety in this segment. Together with customers from a variety of markets, we were able to develop a solution that is easy to handle and at the same time has a big effect."

Alexander Greschner, Sales Director of Wacker Neuson SE.





The whole performance in numbers.

dual view	DV60	DV90	DV100	
Power output (kW)	55	55	55	
Payload (kg)	6,000	9,000	10,000	
Skip volume heaped (I)	3,600	4,600	5,000	
Maximum speed (km/h) *	30	30	30	
Machine width in (mm)	2.250	2.450	2.450	

^{*} Front tip skip



www.wackerneuson.com